

# High Voltage Transformer

## TYPE:TR06-S002 UR-18


### Applications:

- AIR CLEANER.
- ELECTRONIC OZONIZER.
- ELECTROSTATIC PRODUCTS.

※Remark:Below here which specific could depend on customized specifications are acceptable.

MECHANICAL DIMENSION:

UNIT mm

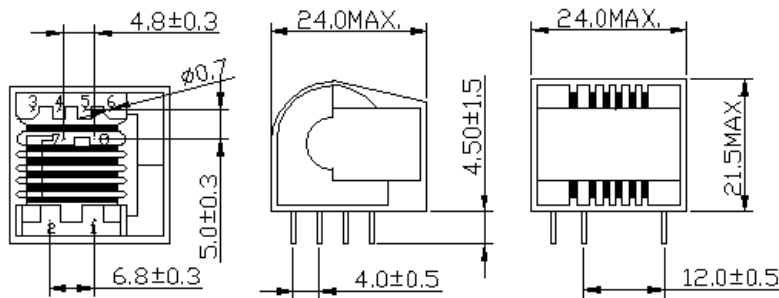

P/N	L (PIN3→PIN5)	L (PIN4→PIN6)	L (PIN7→PIN1)	DCR (PIN3→PIN5)	DCR (PIN4→PIN6)	DCR (PIN7→PIN1)	TURNS RATIO	WEIGHT
JC-93005A	$21.5\mu\text{H} \pm 15\%$	$12.0\mu\text{H} \pm 15\%$	$1.23\text{H} \pm 15\%$	$110\text{m}\Omega \text{ MAX}$	$100\text{m}\Omega \text{ MAX}$	$545\Omega \text{ MAX}$	1:250	24 g
P/N	L (PIN6→PIN4)	L (PIN3→PIN5)	L (PIN7→PIN1)	DCR (PIN6→PIN4)	DCR (PIN3→PIN5)	DCR (PIN7→PIN1)	TURNS RATIO	WEIGHT
JC-0013E/C	$41\mu\text{H} \pm 15\%$	$4.9\text{mH} \pm 15\%$	$2.4\text{H} \pm 15\%$	$288\text{m}\Omega \text{ MAX}$	$8.3\Omega \text{ MAX}$	$656\Omega \text{ MAX}$	10:110:2500	24 g
P/N	L(PIN3→PIN4) L(PIN4→PIN5)	L (PIN8→PIN6)	L (PIN7→PIN1)	DCR(PIN3→PIN4) DCR(PIN4→PIN5)	DCR (PIN8→PIN6)	DCR (PIN7→PIN1)	TURNS RATIO	WEIGHT
JC-88090	$60\mu\text{H} \pm 15\%$	$3.8\mu\text{H} \pm 15\%$	$1.8\text{H} \pm 15\%$	$200\text{m}\Omega \text{ MAX}$	$64\text{m}\Omega \text{ MAX}$	$440\Omega \text{ MAX}$	1:175	24 g
JC-92059	$54\mu\text{H} \pm 15\%$	$4\mu\text{H} \pm 20\%$	$2.55\text{H} \pm 20\%$	$160\text{m}\Omega \text{ MAX}$	$62\text{m}\Omega \text{ MAX}$	$740\Omega \text{ MAX}$	1:227	24 g
P/N	L (PIN3→PIN6)	L (PIN7→PIN1)		DCR (PIN3→PIN6)	DCR (PIN7→PIN1)		TURNS RATIO	WEIGHT
JC-87021	$19\mu\text{H} \pm 20\%$	$4.5\text{H} \pm 20\%$		$43\text{m}\Omega \text{ MAX}$	$1380\Omega \text{ MAX}$		1:500	23 g

## JET CHAM ENTERPRISE CO.,LTD

ADDRESS: 3F. NO.41 CHIAU AN ST. CHUNG HO DIST .NEW TAIPEI CITY, TAIWAN R.O.C.

OFFICE TEL:886-2-29253396 ~ 7 FAX.:886-2-29288877

FACTORY TEL:886-2-22447326 ~ 7 FAX.:886-2-22447328

E-mail:jetcham.coil@msa.hinet.net / jetcham.jack@msa.hinet.net